








SCRAP

	t min/max · lb min/max		
92EV10	-	2 / 4	-
	-	4400 / 8800	-
92EV20	-	3 / 6	-
	-	6600 / 14000	-
92EV35	-	5 / 8	-
	-	11000 / 18000	-





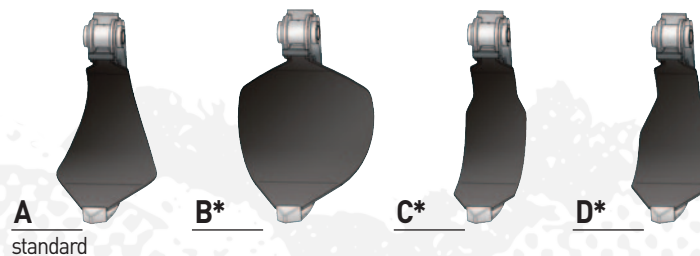

	t min/max · lb min/max		
92EV10	-	0,3 / 2,5	-
	-	660 / 5500	-
92EV20	-	0,3 / 2,5	-
	-	660 / 5500	-
92EV35	-	0,3 / 2,5	-
	-	660 / 5500	-



Model		92EV10	92EV20	92EV35
	m ³	0,13	0,18	0,23
	yd ³	0,2	0,2	0,3
	kg	145	180	310
	lb	322	400	689
	n°	5	5	5
	n°	5	5	5
	bar	250	250	280
	psi	3623	3623	4058
	l/min	30 / 30	50 / 50	70 / 70
	gal/min	7 / 7	13 / 13	18 / 18
A	mm	1250	1410	1350
	in	49,2	55,5	53,1
B	mm	730	760	920
	in	28,7	29,9	36,2
C	mm	1350	1500	1525
	in	53,1	59,1	60,0
D	mm	790	870	1050
	in	31,1	34,3	41,3
E	mm	900	910	1030
	in	35,4	35,8	40,6
	t	0,52	0,75	1,15
	Sh Ton	0,6	0,8	1,3
Rotator (Optional)	model	DTIA0401	DTIA0401	DTIA0600



- * Su richiesta
- * On request
- * Na życzenie

	t min/max · lb min/max	
92EC230	-	5 / 8
	-	11000 / 18000
92EC250	-	6 / 10
	-	13000 / 22000
92EC300	-	8 / 11
	-	18000 / 25000
92EC500	-	15 / 20
	-	33000 / 44000
92EC600	-	19 / 24
	-	42000 / 53000







Model		92EC230	92EC250	92EC300	92EC500	92EC600
	m ³	0,23	0,25	0,3	0,5	0,6
	yd ³	0,3	0,3	0,4	0,7	0,8
	kg	300	350	450	860	1010
	lb	667	778	1000	1911	2244
	n°	5	5	5	5	5
	n°	5	5	5	5	5
	bar	280	280	280	320	320
	psi	4058	4058	4058	4638	4638
	l/min	60 / 70	60 / 70	70 / 80	110 / 120	150 / 160
	gal/min	15 / 18	15 / 18	18 / 21	29 / 31	39 / 42
A	mm	1260	1420	1630	1830	2045
	in	49,6	55,9	64,2	72,0	80,5
B	mm	670	740	810	995	1295
	in	26,4	29,1	31,9	39,2	51,0
C	mm	1440	1630	1850	2100	2285
	in	56,7	64,2	72,8	82,7	90,0
D	mm	1000	1080	1210	1490	1515
	in	39,4	42,5	47,6	58,7	59,6
E	mm	810	870	960	1165	1295
	in	31,9	34,3	37,8	45,9	51,0
	t	1,65	1,55	2,15	2,75	2,9
	Sh Ton	1,8	1,7	2,4	3,0	3,2
Rotator (Optional)	model	DTIA0600	DTIA0600	DTIA1200	DTIA1002	DTIA1002



SCRAP

t min/max · lb min/max			
92EV280	-	8 / 14	-
	-	17000 / 31000	-
92EV320	-	8 / 14	-
	-	17000 / 31000	-
92EV400	-	14 / 20	-
	-	31000 / 44000	-
92EV500	-	18 / 23	-
	-	40000 / 50000	-
92EV600	-	22 / 30	-
	-	48000 / 66000	-
92EV800	-	24 / 32	-
	-	53000 / 70000	-
92EV1000	-	30 / 40	-
	-	66000 / 88000	-
92EV1500	-	35 / 45	-
	-	77000 / 100000	-

t min/max · lb min/max			
92EV280	-	1,5 / 3	-
	-	3500 / 6500	-
92EV320	-	1,5 / 3	-
	-	3500 / 6500	-

Model		92EV280	92EV320	92EV400	92EV500	92EV600	92EV800	92EV1000	92EV1500
	m ³	0,28	0,32	0,4	0,5	0,6	0,8	1	1,5
	yd ³	0,4	0,4	0,5	0,7	0,8	1,1	1,3	2,0
	kg	580	620	930	1140	1500	1630	2450	2850
	lb	1289	1378	2067	2533	3333	3622	5444	6333
	n°	5	5	5	5	5	5	5	5
	n°	5	5	5	5	5	5	5	5
	bar	300	300	300	300	300	300	300	300
	psi	4348	4348	4348	4348	4348	4348	4348	4348
	l/min	80 / 90	80 / 90	110 / 120	150 / 160	170 / 180	170 / 180	240 / 250	240 / 250
	al/min	21 / 23	21 / 23	29 / 31	39 / 42	44 / 47	44 / 47	63 / 65	63 / 65
A	mm	1600	1680	1750	1930	2110	2320	2400	2760
	in	63,0	66,1	68,9	76,0	83,1	91,3	94,5	108,7
B	mm	1080	1100	1370	1470	1580	1600	1860	1960
	in	42,5	43,3	53,9	57,9	62,2	63,0	73,2	77,2
C	mm	1720	1800	1960	2140	2290	2530	2640	3040
	in	67,7	70,9	77,2	84,3	90,2	99,6	103,9	119,7
D	mm	1090	1170	1240	1320	1510	1620	1840	2040
	in	42,9	46,1	48,8	52,0	59,4	63,8	72,4	80,3
E	mm	1270	1320	1620	1780	1870	1980	2265	2400
	in	50,0	52,0	63,8	70,1	73,6	78,0	89,2	94,5
	t	1,65	1,55	2,15	2,75	2,9	2,6	4,5	3,9
	Sh Ton	1,8	1,7	2,4	3,0	3,2	2,9	4,9	4,3
Rotator (Optional)	model	DTIA1500	DTIA1500	DTIA1002	DTIA1002	DTIA1002	DTIA2001	DTIA2001	na żądanie

